

DATENBLATT

USB2.0 Anschlusskabel A-Mini B (5polig), St.-St., 0,5m, schwarz, Premium



Beschreibung

Für Datenübertragungsraten bis zu 480 Mbit/s. Leitermaterial: Kupfer. Leiterdurchmesser: AWG28 / AWG20. Schirmung: Folie + 80% Geflechschirm. Umspritzte Stecker, PVC Mantel.

Verfügbare Varianten


ArtNr.	Bezeichnung	Farbe	Länge	Durchmesser	AWG
K5251SW.0,5	USB2.0 Anschlusskabel A-Mini B (5polig), St.-St., 0,5m, schwarz, Premium	schwarz	0,5 m	5,0 mm	20+28AWG

Zeichnungen

Dieses Datenblatt wurde maschinell am 16-07-2025 erzeugt. Technische Änderungen vorbehalten.


DATENBLATT

USB2.0 Anschlusskabel A-Mini B (5polig), St.-St., 0,5m, schwarz, Premium

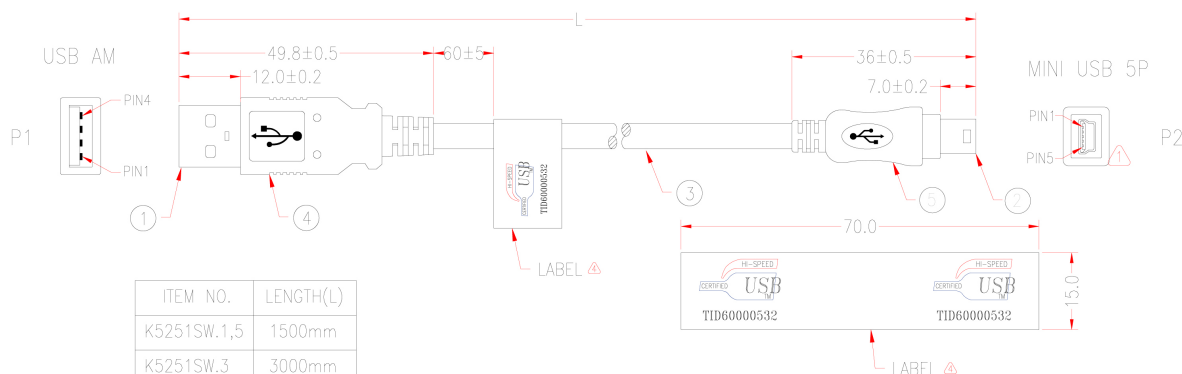

MARKING:

HI-SPEED USB Revision 2.0 SHIELDED 28AWG/1P+20AWG/2C (UL) TYPE CM 75°C

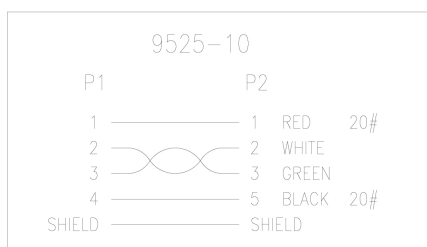

* NOTE: All relevant materials are complied with RoHS directive .

△ The cable must accord:
Operating temperature: between -20°C and +80°C
Storage temperature: between -40°C and +85°C
100% SHORT AND OPEN TEST

5	BLACK HEAT SHRINK TUBE $\phi 1.0 \times 5\text{mm}$		4	M959
	MOLDED PVC BLACK	HTBF10-0304K09		M304
4	MOLDED PVC BLACK	HTBF10-0304K09		M304
3	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 20AWG, BRAID 80%, OD 5.0mm, JACKET BLACK, DRAWING NO. EUAB2801P2002C-096	H5KH22-0304K09	L=20mm	M304
2	MINI USB 5P MALE 2.0, GOLD PLATING 30μ" ON CONTACTS, BLACK INSULATOR SOLDER TYPE	A1HE10-0108	1set	M108
1	USB A MALE 2.0, GOLD PLATING 30μ" ON CONTACTS, WHITE INSULATOR, SOLDER TYPE	A1HA12-0108	1set	M108
No.	DESCRIPTION		Q'TY	Supplier

